

JAOP8

NEW



JAOP8



EBake
Standard
control



Standard
proofer control



Optional
relative humidity proofer
control

*“Superior quality product
at an affordable price !”*

OVEN : 8 pans baking capacity
PROOFER : 12 pans capacity

Standard Features

- Outstanding steam shot and pulse injection system
- Exclusive patented reversing fan system
- Two speeds fan
- Fan delay switch
- Compact space saving unit
- High production oven
- Full view heat reflective thermos glass doors
- Brightly lit
- Manual mode and user friendly EBake programmable control up to 99 recipes
- Fully insulated, completely sealed
- Digital temperature controllers and timers
- Temperature up to a maximum of 500°F (260°C)
- Energy efficient electric or gas heating (baking temperature reached in 15 minutes)
- Magnetic latches
- Door switch cutoff for fan motor
- Stainless steel inside and outside
- Locking casters
- 3/4 HP motor
- ETL & NSF listed
- One year parts and labor limited warranty

Proofer Features

- Holds from 90° F to 110° F (32°C to 43°C) with relative humidity up to 95 %
- Glass doors
- Rust proof, scratch proof shelving
- Automatic water float system (no water pans to fill)
- Brightly lit
- Magnetic latches
- Stainless steel inside and outside

Optional

- Water softener system
- Gas quick disconnect kit (4' (1220 mm) flexible hose, ball valve and securing device)
- Electronic relative humidity control on proofer

JET AIR OVEN PROOFER JAOP8

The JAOP series from Doyon is known worldwide for its unique and patented Jet Air System (the air moves in one direction for 2.5 minutes, stops for 25 seconds then moves the other way for 2.5 minutes) resulting in a gentle velocity air flow for exceptional baking results. This system will help you bake faster and more evenly. Our competitors ovens allow the air to move in one direction only.

Doyon's outstanding uniform steam injection system includes an electronic timer which will give you a precise mist everytime for a better quality product (crusty breads, bagels, french baguettes, etc.). This superior steam system will allow inexperienced employees to produce quality products with a minimum of training.

Doyon's proofer provides uniform proofing from top to bottom with its even air flow system and fully automatic humidity injection (no water pans to fill). It comes with heat and humidity controls. It's the easiest way to proof.

VERSATILITY

Bread, rolls, buns, crusty breads, pastries, muffins, cakes, pies, bagels, croissants, sours & ryes, bacon, game hens, chicken, turkey, multimeal prep, bulk vegetables, casseroles, slow cook, retherm.

*All JAOP ovens can
be used to cook meat*

DIMENSIONS

JAOP8	36 3/8" W X 52" D	X 75 1/2" H
	(924 mm X 1321 mm	X 1918 mm)
JAOP8G	36 3/8" W X 54 1/2" D	X 75 1/2" H
	(924 mm X 1384 mm	X 1918 mm)

OVEN INTERIOR DIMENSIONS

JAOP8	23 1/2" W X 31" D	X 33 1/2" H
	(597 mm X 787 mm	X 851 mm)
JAOP8G	23 1/2" W X 30" D	X 33 1/2" H
	(597 mm X 762 mm	X 851 mm)

Shelf spacing : 3 1/2" (89 mm)

PROOFER INTERIOR DIMENSIONS

26 1/2" W X 42" D	X 25" H
(673 mm X 1065 mm	X 635 mm)

Shelf spacing : 3" (76 mm)

GAS SYSTEM (JAOP8G Propane or natural)

BTU total : 65 000 BTU

1 Phase:

208-240V - 17 A - 4 kW - 60 Hz - 2 wires + Ground

Gas Inlet : 1/2" NPT

Draft hood : 6" (152 mm)

Recommended gas pressure:

Propane gas : 11" W.C.

Natural gas : 7" W.C.

ELECTRICAL SYSTEM (JAOP8)

1 Phase:

208V - 64 A - 14 kW - 60 Hz - 2 wires + Ground

240V - 59 A - 14 kW - 60 Hz - 2 wires + Ground

3 Phases:

208V - 46 A - 14 kW - 60 Hz - 3 wires + Ground

240V - 42 A - 14 kW - 60 Hz - 3 wires + Ground

Other voltages available

Water Inlet : 1/4" NPT

Minimum clearance from combustible material

1" (25 mm) side and back

4" (102 mm) bottom

12" (305 mm) top

CAPACITY

Oven

Standard sheet pans 18" X 26" (457 mm X 660 mm) : 8 pans

Four-strapped bread pans : 16 loaves

9" (229 mm) : 40 pies

Proofer

Standard sheet pans 18" X 26" (457 mm X 660 mm) : 12 pans

Four-strapped bread pans : 36 loaves

FINISH

Stainless steel

SHIPPING WEIGHT


JAOP8 1000 lb (454 kg) approximately

JAOP8G 1135 lb (515 kg) approximately






Electrical service connection and water inlet are located at the back of the unit.

Specifications and design subject to change without notice.


JAOP8



JAOP8G

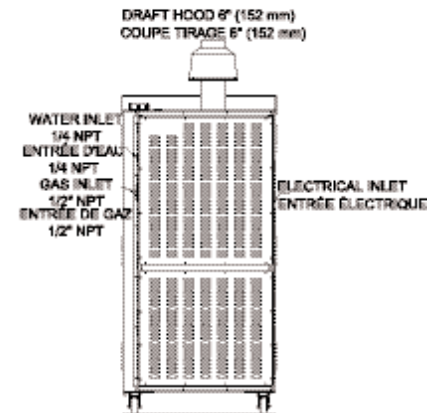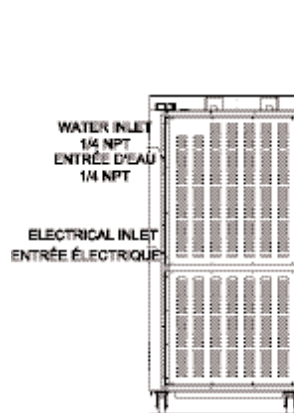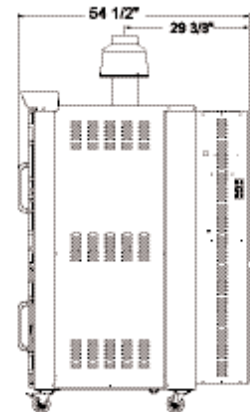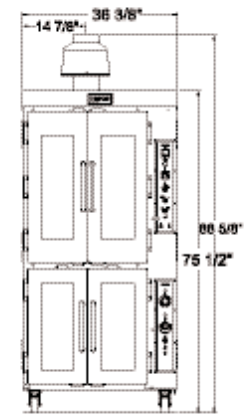

Your local distributor:

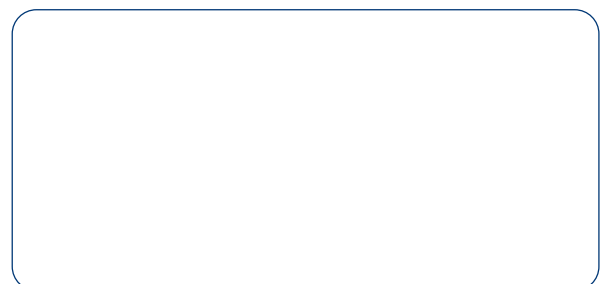

1255, rue Principale
Linière, Beauce, Québec, Canada G0M 1J0

Telephone : (418) 685-3431 Fax: (418) 685-3948
Canada : (800) 463-1636 U.S.: (800) 463-4273
E-Mail : doyon@doyon.qc.ca Internet: http://www.doyon.qc.ca